


VAT-S-7982



Application

Stainless steel fixing onto aluminium. Predrilling necessary.

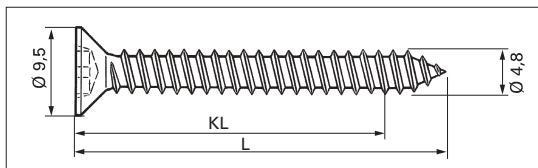

Additional informations

Fastener:




- stainless steel tapper
- SR recess - stick fit wobble free

Head shape / drive

Countersunk / SR drive



Technical value

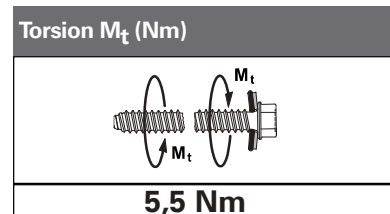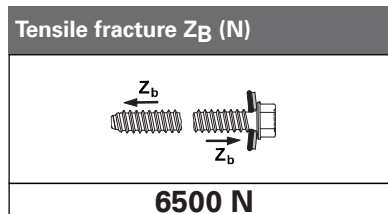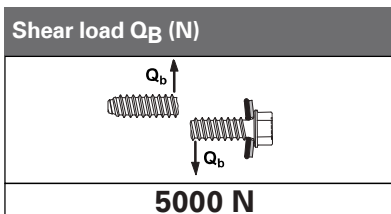

Handling guideline for automatic processing

- speed under load 400 - 500 U/min.
- axial load 150 N
- trouble-free processing with SR drive

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent guaranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.